Journal of Physics: Conference Series

PAPER • **OPEN ACCESS**

Aerodynamics and flow pattern performance evaluation of off road vehicle for various velocity range and angle of incidence

To cite this article: JV Muruga Lal Jeyan *et al* 2020 *J. Phys.: Conf. Ser.* **1473** 012001

View the article online for updates and enhancements.



IOP ebooks™

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

This content was downloaded from IP address 103.211.80.6 on 07/03/2020 at 05:37

Aerodynamics and flow pattern performance evaluation of off road vehicle for various velocity range and angle of incidence

JV Muruga Lal Jeyan[1], Kavya S Nair[2] and Krishna S Nair[3]
[1] Department of Aerospace - Lovely professional university- India
[2,3] Department of Aerospace - Lovely professional university- India

E-mail: jvmlal@gmail.com

Abstract. It is complex to amplify the significance of flow visualization. This is factual whether the methodology is strictly theoretical, primarily experimental, primarily computational or some combination as is always the most effective. The ability to see flow patterns on and around the device under investigation often gives insight into a solution to an aerodynamic problem. The reasonable mental image of a flow about a body is almost necessary for a researcher to have a useful understanding of an aerodynamic or hydrodynamic problem. We researcher and aerodynamicist believe possibilities of some significant difference in results obtained by computation and mental image and the experimental evidences resolve the uncertainty. In our research primitive variables that describe the flow and qualities are found to be use full in flow visualization phenomena. We resolve this with the concept of path line, stream line, streak line and time line approaches. A selective off road vehicle scaled model is tested by considering all the parameters. A low speed wind tunnel test facility with a calibrated test section size of 200 X200mm, low flow angularity providing acceptable laminar level and smoke tunnel facility is used for experimentations. The scale downed model is rationed with an allowable blockage factor not more than 10% is tested to a velocity range of 10m/s –50 m/s. Entire study and experiments on this Off-Road vehicle aerodynamics bounces adequate results. This experimental results and solutions will be useful for future young researchers in the field of off road vehicle design Aerodynamic analysis, more over this results gave a conceptual study for the person who drives the vehicle about the maximum occurrences, maximum possible drag and side slips over the vehicle.

1. Introduction

Aerodynamic studies of passenger and special purpose vehicles become essential when optimization and performance evaluation parameters need to be enhanced for new models or upgraded models. As competition among the different manufacturers have increased due to the globalization of industries and every industry wants to have higher shares in the market thus it becomes crucial for them to launch new models having good esthetic and performance compared to other competitive models. Also, due to increase in the fuel prices, efficient aerodynamic designs are required to increase the fuel efficiency of the vehicle. In this regard, drag calculation becomes critical as it can affect the esthetic and performance of the vehicle. Aerodynamics play an important role in increasing the overall performance of the vehicle. Various computational analysis needs to be done by the manufacturers before starting the actual production of the vehicle however, due to copyright issues, the results of same are not frequently available in the public domain. Few researchers have performed aerodynamic studies on the vehicles in order to evaluate the impact of various flow parameters like velocity, surface area of wind shield, aerodynamic design [1] etc. Usually, aerodynamic drag has two components; i) skin friction drag and ii) pressure drag. Out of which pressure drag is depending upon the skin geometry due to flow separation

Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.
Published under licence by IOP Publishing Ltd

issues and formation of wake region behind the vehicle and it contributes about 80%. The point of separation determines the size of wake region and it helps in finding out the magnitude of the aerodynamic drag. From the past studies, it has been identified that this drag is responsible for the large fuel's consumption and contributes 50% of total fuel consumption at top speeds [2]. Drag reduction itself provides a great and inexpensive solution in order to improve the fuel economy therefore it becomes essential part of the optimization [3]. The drag is also depending on the angle at which air strikes the windshield of the moving vehicle. Studies related to aerodynamic design of the on-road vehicle are very rare as it requires plenty of instruments to be installed during the testing [4-20]. Therefore, it is always recommended to test the scale down or exact model in the wind tunnel in order to get more clarity and control on the flow situations. Therefore, in the present study, a selective off road vehicle scaled model is tested by considering all the flow parameters. A low speed wind tunnel test facility with a calibrated test section size of 200x200mm, low flow angularity providing acceptable laminar level and smoke tunnel facility is used for experimentations. The scale downed model is rationed with anallowable blockage factor not more than 10% is tested to a velocity range of 10m/s –50 m/s. Under gone testing of the scale downed model of off road vehicle made of MS and sheet metal with various condition and parameters such as (A) with wind shield (B) Without wind shield (C) Angle of incidence of ranging from 0°to -10° (D) Side force (C) drag force (F) flow patterns over the vehicle. Entire study and experiments on this Off-Road vehicle aerodynamics bounces adequate results. Those outcomes are used in real coordination before manufacturing and before challenging the race contest. This experimental results and solutions will be useful for future young researchers in the field of off road vehicle design Aerodynamic analysis, more over this results gave a conceptual study for the person who drives the vehicle about the maximum occurrences, maximum possible drag and side slips over the vehicle. And it is crystal clear with this well-convinced flow visualization and aerodynamic testing approach, produces results to the designers an ushers in a sterling performance variation is their between shield and unshielded vehicle for a range of velocity and angle of incidence range.

2. Methodologies

A selective off road vehicle scaled model with contraction ratio 100:1 is tested with and without wind shield in a low speed wind tunnel facility. For different angle of attack, the drag force and side force on the vehicle, with and without wind shield at different velocities is obtained. Then, the drag force and side force for vehicle with wind shield and without wind shield are compared. Subsonic wind tunnel facility is used for the aerodynamic research to study the flow properties of the vehicle with and without wind shield. Test section type: 200x200mm Contraction ratio- 100:1

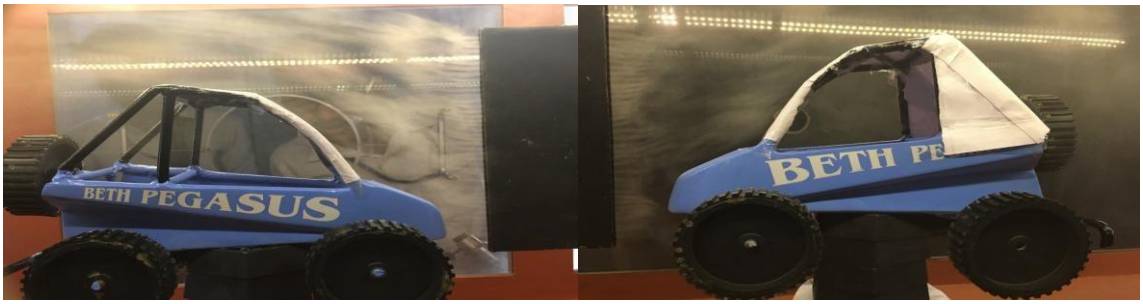


Figure .1 set up at wind tunnel test section

3. Results and Discussion

Table 1 shows the values of side force and drag force for different velocities at 0, 5, -5, 10 and 10 degree angle of attack for the vehicle without wind shield and Table 2 shows the values of side force and drag force for different velocities at 0, 5, -5, 10 and -10 degree angle of attack for vehicle with wind shield.

Without wind shield				With wins shield			
Velocity	AOA	Drag force	Side force	Velocity	AOA	Drag force	Side force
20	10	4.1	0.2	20	10	5.2	0.2
30	10	9.2	0.4	30	10	10.7	0.4
40	10	17.3	1.1	40	10	18.5	0.6
20	5	3.9	1.4	20	5	5	0.7
30	5	9.3	0.9	30	5	10	1.2
40	5	16.5	1.6	40	5	17.6	2.5
20	0	3.7	0.2	20	0	4.4	0.3
30	0	7.9	0.9	30	0	9.2	0.5
40	0	15.4	1.6	40	0	17.2	1.6
20	-5	4.3	0.4	20	-5	5	0.7
30	-5	9.6	0.9	30	-5	10.8	1.4
40	-5	16.4	1.8	40	-5	17.4	2.3
20	-10	5.1	0.2	20	-10	6.4	0
30	-10	10.7	0.4	30	-10	13.1	0.3
40	-10	18.5	0.13	40	-10	20.3	0.7

Table 1. Without and with wind shield

3.1 Result discussion of drag force

Fig 2 shows that at 10 degree angle of attack, the drag force acting on the vehicle with wind shield is more than the drag force acting on the vehicle without wind shield. This implies that for usage of wind shield, the drag has to be compensated with mass or other parameters. Fig 3 shows that at 5 degree angle of attack, the drag force experienced by the vehicle with wind shield is slightly more than the drag force experienced by the vehicle without wind shield Figure 4 shows that at at 0 degree angle of attack, the drag force acting on the vehicle with wind shield and drag force acting on the vehicle without wind shield is initially somewhat similar but gradually the drag force acting on the vehicle with wind shield increases. Figure 5 shows that at -5 degree angle of attack, the vehicle with wind shield experiences more drag force compared to the vehicle without wind shield. The difference in their drag forces remain constant at every velocity. Figure 6 shows that at -10 degree angle of attack, the drag force experienced by the vehicle with wind shield is much more compared to drag force experienced by the vehicle without wind shield.

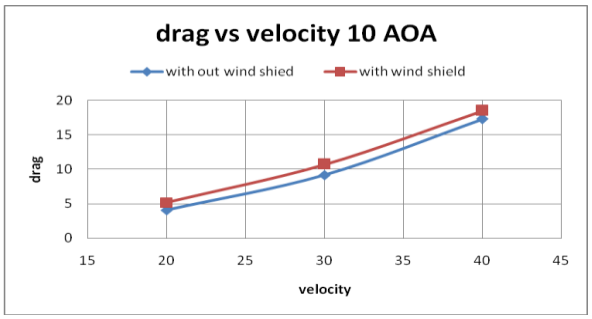


Figure 2

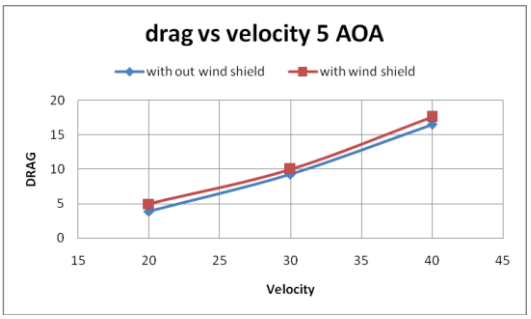


Figure 3

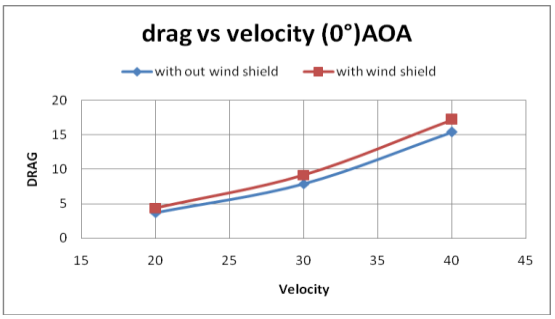


Figure 4

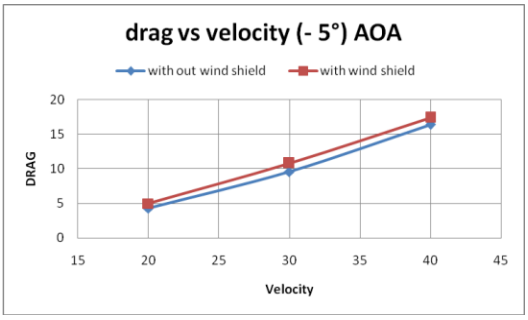


Figure 5

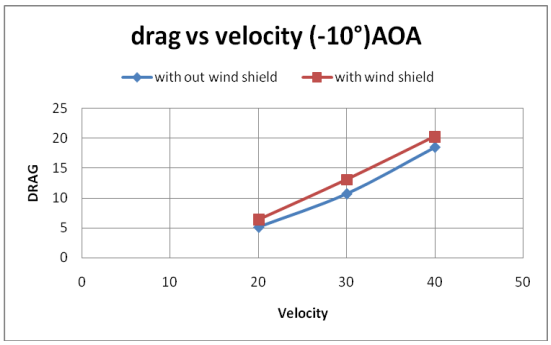


Figure 6

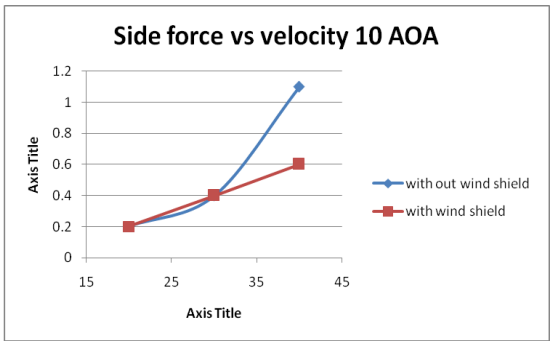


Figure7

3.2 Result and discussion on side force

Figure 7 shows that at 10 degree AOA, for vehicle without wind shield, the side forces first increase gradually with velocity to a particular point and then experience a sudden rise in side forces, whereas for vehicle with wind shield, the increase in side force is constant with increase in velocity and is less than that of vehicle without wind shield. .Fig 8 depicts that at 5 degree AOA, the vehicle without wind shield experiences a linear rise in side forces with velocity increment. The vehicle with wind shield experiences a sudden increment in side forces with velocity after a gradual rise of the forces till a particular value of velocity. Fig 9 shows that at 0 degree AOA, the side forces experienced by vehicle without wind shield increase at a constant rate with velocity. For vehicle with wind shield, the side forces increase suddenly after some time. At a particular point of velocity, the side forces acting on both the vehicle is the same. Fig 10 shows that at -5 degree AOA, the side forces acting on vehicle with wind shield is higher than the side forces experienced by vehicle without wind shield. Fig 11 shows that at -10 degree AOA, in vehicle without wind shield, the side forces first increase with velocity to a particular point and then gradually decrease, whereas the side forces on vehicle with wind shield increase constantly with velocity.

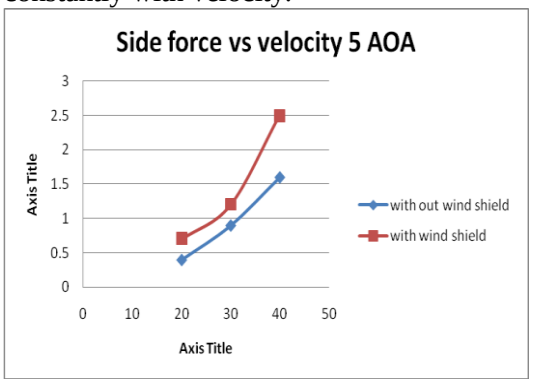


Figure 8

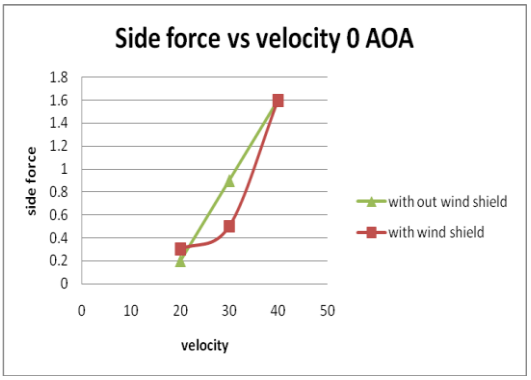


Figure 9

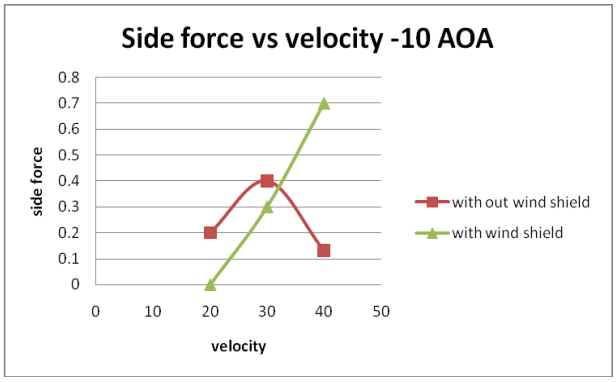


Figure 10

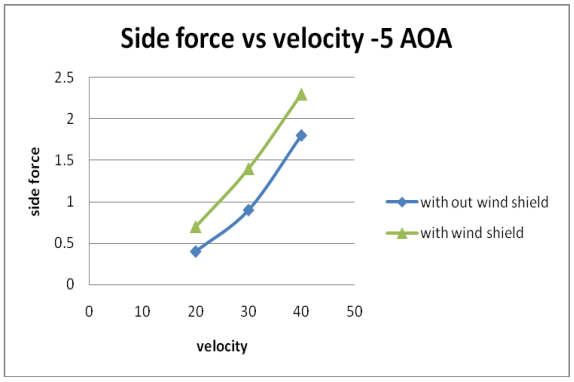


Figure 11

4. Conclusions

Aerodynamics surely has a pivotal role when the overall performance of a vehicle comes into play. This has been proven for all kinds of vehicles with even and uneven surfaces. The flow visualization during the testing of the off road vehicle scaled model with and without wind shield in subsonic wind tunnel facility shows that variation always occurs to the drag and side forces acting on the surface affecting the overall performance of the vehicle. These experimental results can be utilized by our university for the construction and arrangement of off road vehicles including Go Kart championships.

References

[1] Krishnani, P. N. (2009) CFD « study the of drag reduction of a generic sport utility vehicle, Master's Thesis, Mechanical Engineering Department, California State University, Sacramento.

[2] Harinaldi, Budiarso, Tarakka, R. and Simanungkalit, S.P. (2011) « Computational analysis of active flow control to reduce aerodynamics drag on a van model, International Journal of Mechanical & Mechatronics Engineering IJMME-IJENS,Vol. 11(3), pp24-30.

[3] Hucho, W. H. and Sovran, G. (1993) Aerodynamics of road vehicles, Annual Review of Fluid Mechanics, Vol. 25(1), pp485-537.

[4] Mayer, W., and Wickern, G. (2011) The new audi A6/A7 familyaerodynamic development of different body types on one platform, SAE International Journal of Passenger Cars-Mechanical Systems, Vol. 4(1), pp197-206.

[5] Chainani. A, and Perera. N, (2008) CFD Investigation of airflow on a model radio control race car, WCE 2008, 2-4July, London.

[6] Wood, R.M. (2004) Impact of advanced aerodynamic technology on transportation energy consumption. SAE Technical Paper 2004-01- 1306.

[7] Bellman, M., Agarwal, R., Naber, J., and Chusak, L. (2010) Reducing energy consumption of ground vehicles by active flow control. In ASME 2010 4th International Conference on Energy Sustainability, pp 785- 793, American Society of Mechanical Engineers.

[8] Tarakka, R., and Simanungkalit, S. P. (2013) Effect of active control by blowing to aerodynamic drag of bluff body van model, International Journal of Fluid Mechanics Research, Vol.40(4), pp312-323.

[9] Kourta, A., and Gilliéron, P. (2009) Impact of the automotive aerodynamic control on the economic issues, Journal of Applied Fluid Mechanics, Vol.2(2), pp69-75.

[10] Bideaux, E., Bobillier, P., Fournier, E., Gilliéron, P., Hajem, M., Champagne, J. Y., and Kourta, A. (2011) Drag reduction by pulsed jets on strongly unstructured wake: towards the square back control, International Journal of Aerodynamics, Vol.1(3), pp282-298.

[11] Kotapati, R. B., Mittal, R., &Cattafesta III, L. N. (2007) Numerical study of a transitional synthetic jet in quiescent external flow. Journal of Fluid Mechanics, Vol.581, pp287-321.
[12] Kourta, A., and Leclerc, C. (2013) Characterization of synthetic jet actuation with application to Ahmed body wake, Sensors and Actuators A: Physical. 192, pp13-26.
[13] J. V. Muruga Lal Jeyan , AkhilaRupesh , Jency Lal "Aerodynamic Shape Influence and Optimum
Thickness Distribution Analysis of Perceptive Wind Turbine Blade" International Journal of Emerging Research in Management &Technology ISSN: 2278-9359 (Volume-7, Issue-3)
[14] Park, H., Cho, J. H., Lee, J., Lee, D. H., and Kim, K. H. (2013) Aerodynamic drag reduction of Ahmed model using synthetic jet array, SAE International Journal of Passenger Cars-Mechanical Systems, Vol 6(1), pp1-6.
[15] Kang, S. O., Jun, S. O., Park, H. I., Song, K. S., Kee, J. D., Kim, K. H., and Lee, D. H. (2012) Actively translating a rear diffuser device for the aerodynamic drag reduction of a passenger car, International Journal of Automotive Technology, Vol.13(4), pp583-592.
[16] Bruneau, C. H., Creusé, E., Depeyras, D., Gilliéron, P., &Mortazavi, I. (2010) Coupling active and passive techniques to control the flow past the square back Ahmed body, Computers & Fluids, Vol.39(10), pp1875- 1892.
[17] Heinemann, T., Springer, M., Lienhart, H., Kniesburges, S., and Becker, S. (2012) Active flow control on a 1: 4 car model, In 16th IntSymp on Applications of Laser Techniques to Fluid Mechanics Lisbon, Portugal, 09-12 July.
[18] J V Muruga lal Jeyan, Jency Lal, M Senthil Kumar,Arfaj Ahamed Anwar"Flight maneuvering and safe flight visualization with the aid of wide-ranging scrutiny and automation software "MATEC Web Conf. Article Number 01021Volume 272, 2019,13 March 2019, Pages 8
[19] Littlewood, R. P., and Passmore, M. A. (2012) Aerodynamic drag reduction of a simplified squareback vehicle using steady blowing, Experiments in fluids, Vol. 53(2), pp519-529.
[20] Eichinger, S., Thiele, F., and Wassen, E. (2010) LES of active separation control on bluff bodies by steady blowing, FEDSMICNMM2010-30462, pp.1055-1063.
[21] Aubrun, S., McNally, J., Alvi, F., and Kourta, A. (2011) Separation flow control on a generic ground vehicle using steady microjet arrays, Experiments in fluids, Vol.51(5), pp1177-1187.
[22] Wassen, E., and Thiele, F. (2010) Simulation of active separation control on a generic vehicle, In at: 5th AIAA Flow Control Conference, Chicago, USA.
[23] J V Muruga lal Jeyan , Dr. M. Senthil Kumar, "Performance Evaluation of Yaw Meter With the Aid of Computational Fluid Dynamic" , International Review of Mechanical Engineering (IREME). ISSN: 1970-8734, Vol No. 8,Issue 02